

南京拓品微电子有限公司

NanJing Top Power ASIC Corp.

DATASHEET

TP5000X

(2A switching 3.6V/4.2V /4.35V lithium battery

Charger)

Description

TP5000X is a switching buck single manganese lithium battery charge management chip. Its ESOP8 package with simple peripheral circuit, making the TP5000X is ideal for portable equipment large current charging management applications. Meanwhile, TP5000X built-in input overcurrent, undervoltage protection, over temperature protection, short circuit protection, battery temperature monitoring, reverse battery protection, shutdown OVP function due to excessive input power.

TP5000X has a wide input voltage range, it has a three-stage charging function: Trickle pre-charge, constant current and constant voltage. Trickle pre-charge current, constant current charging current can be adjusted through an external resistor, the maximum charging current is 2A. TP5000X is operated under switching frequency of 800kHz, so that it can use smaller-scale external components and remain cooler in high current charging scenario. TP5000X has built-in power MOSFET, it also employs current backflow protection, as a result no external Schottky diodes are needed.

Characteristics

- Single cell charger IC that supports Li-Ion and LiFePO4 batteries. Cut-off Voltage: 3.6V, 4.2V, 4.35V
- Solar panels can be used as input power sources
- Input power adaptive function
- Input OVP
- Programmable charge current, 0.1A - 2A
- Built-in current backflow Protection, no need of external Schottky diode
- Wide operating voltage up to 9V
- Two LED charge status indicator
- Chip OTP, charging current OCP, Under Voltage Lockout.
- Battery temperature sensing and protection, battery reverse-connection shutdown, short-circuit protection.
- Switching frequency 800KHz, works with inductor of 2.2uH-10uH
- Automatic recharge function
- Precise cut-off voltage control: Deviation Less than 1%

- 3-stage charging to protect the battery: trickle current, constant current, and constant voltage
- ESOP8 package

Absolute Maximum Ratings

- Input supply voltage (VIN): 9V
- BAT: 0V ~ 9V
- BAT short duration: continuous
- Maximum Junction Temperature: 145°C
- Operating ambient temperature range: -20°C to 85°C
- Storage temperature range: -30°C ~ 100°C
- Lead Temperature (Soldering, 10 sec): 260°C

Application

- Portable devices, various chargers
- PDAs, mobile cellular phone
- Tablet PC, Miner's lamp
- Power Tools

Typical applications

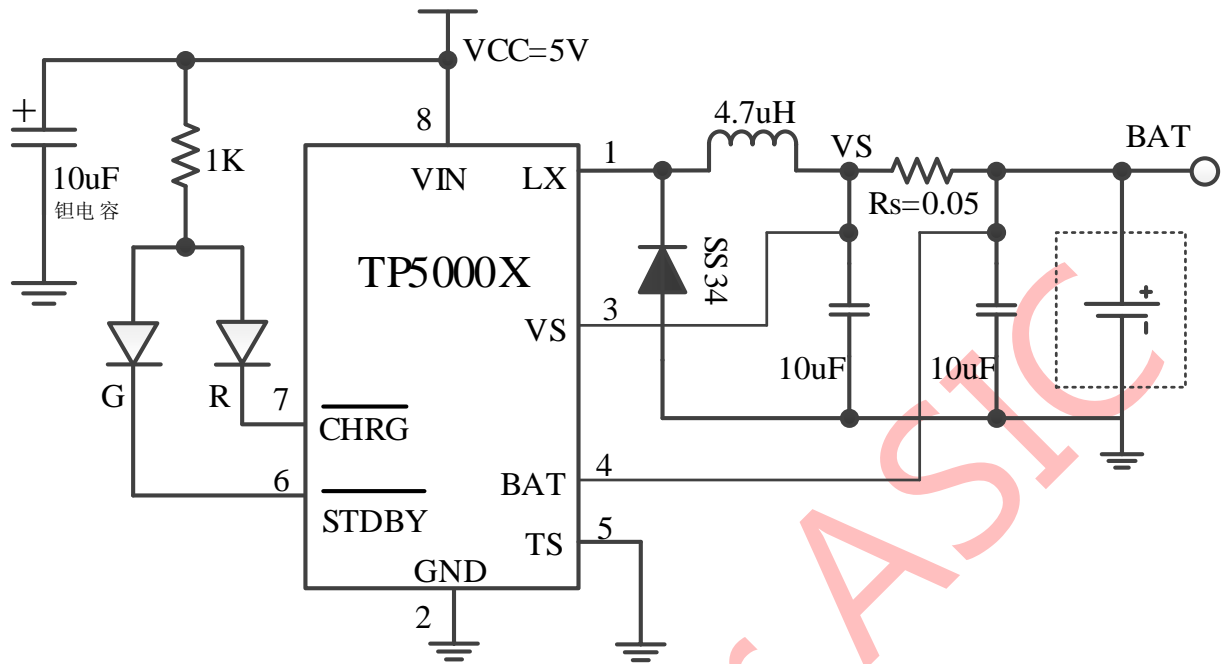


Figure 1 TP5000X 4.2V lithium-ion battery charging 2A Application Diagram

Package / Ordering Information

<p>8-pin ESOP8 package (Heat sink grounding can not be connected to other potential) YYWW: Production year and week</p>	<p>TP5000X-3.6V-ESOP8 TP5000X-4.2V-ESOP8 TP5000X-4.35V-ESOP8</p> <p>AYYWWX→4.35V BYYWWX→4.2V CYYWWX→3.6V</p> <p>Product pictures</p>
---	--

TP5000X functional block diagram

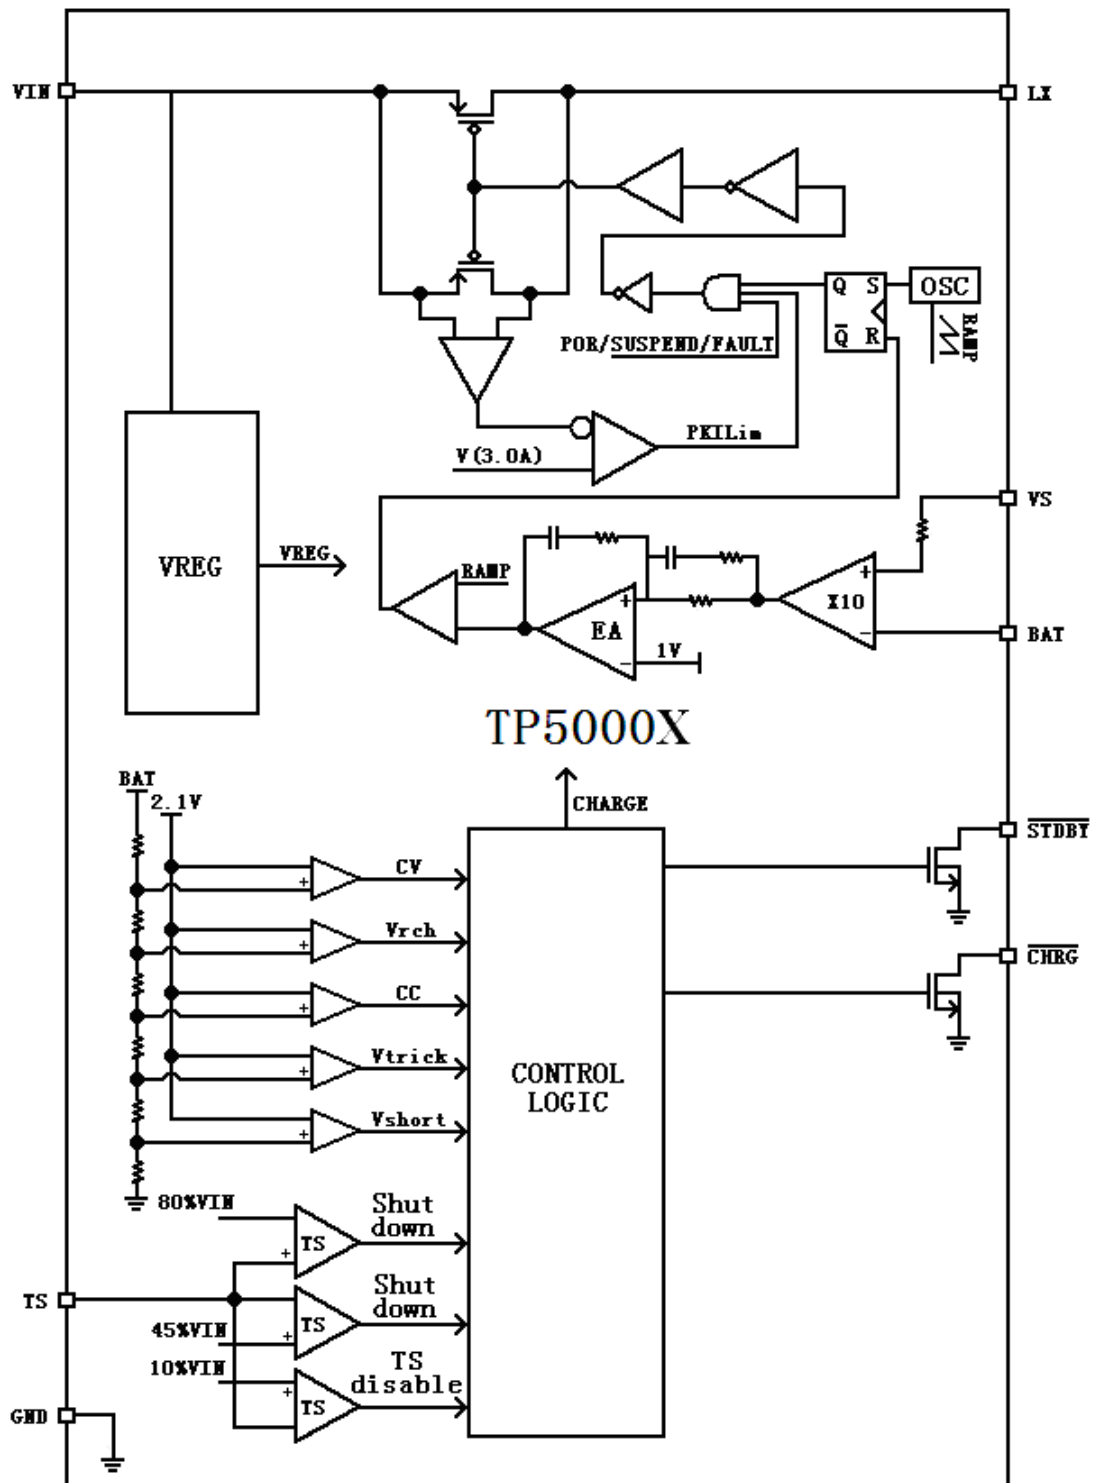


Figure 2 Functional block diagram of TP5000X

Electrical characteristics

Table 1 TP5000X electrical characteristics of energy parameters

Where a sign ● denotes specifications which apply over the full operating temperature range, otherwise refers only to TRAR = 25 ° C. VIN = 5V, unless otherwise noted.

Symbol	Parameter	Condition		Min	Typ	Max	Unit
VIN	Input supply voltage		●	4.5	5	9.0	V
ICC	Input supply current	Charge mode, RS=0.1Ω	●		250	500	μA
		Standby mode (Charge termination)	●		180	250	μA
		Shutdown mode	●		180	250	μA
		(CS=GND, VIN<VBAT, or VIN<VUV)			180	250	μA
VFLOAL	Charge cut-off voltage	3.6V Lithium ion battery		3.564	3.6	3.636	
		4.2V Lithium ion battery		4.158	4.2	4.242	V
		4.35V Lithium ion battery		4.306	4.35	4.394	V
IBAT	BAT Pin Current: (Current-mode test conditions CS=VIN、Battery voltage=3.8V)	RS=0.1Ω, Constant current mode	●	850	1000	1150	mA
		RS=0.067Ω, Constant current mode	●	1300	1500	1700	mA
		Standby mode, VBAT=4.2V	●	0	-4	-6	μA
		VIN=0V, VBAT=4.2V	●	0	-4	-6	μA
F	Oscillation Frequency			650	800	950	KHz
DMAX	Maximum duty cycle				100%		
DMIN	Minimum duty cycle			0%			
VTRIKL	Trickle charge threshold voltage (4.2V)	RS=1Ω, VBAT Rise		2.7	2.9	3.0	V
VTRHYS	Trickle charging hysteresis voltage	RS=1Ω		60	80	100	mV
VUV	VIN Undervoltage Lockout threshold	VIN From low to high	●	3.5	3.7	3.9	V
VUVHYS	VIN Undervoltage Lockout hysteresis		●	150	200	300	mV
VADPT		VIN From high to low		4.1	4.3	4.5	V
VASD	VIN-VBAT	VIN From low to high		60	100	140	mV
	Lockout threshold voltage	VIN From high to low		20	50	80	mV
VCHRG	CHRG Pin output low voltage	ICHRG=5Ma			0.3	0.6	V
VSTDBY	STDBY Pin output low voltage	I _{STDBY} =5Ma			0.3	0.6	V
VTEMP-H	TEMP Pin high-end shutdown voltage				>80	82	%*VIN
VTEMP-L	TEMP Pin low-end shutdown voltage			43	<45		%*VIN

ΔV_{RECHRG}	Rechargeable battery threshold voltage	$V_{FLOAT}-V_{RECHRG}$		50	80	100	mV
T_{LIM}	Chip protection temperature				145		°C
R_{ON}	Power FET on-resistance				260		mΩ
t_{ss}	Soft-start time	$I_{BAT}=0$ to $I_{BAT}=0.1V/R_s$			20		μs
$t_{RECHARGE}$	Recharge Comparator Filter Time	V_{BAT} High to Low		0.8	1.8	4	ms
t_{TERM}	Termination Comparator Filter Time	I_{BAT} Below C/10		0.8	1.8	4	ms
ESD	HBM	All other pins to GND(-)			2.4		KV

Typical Performance

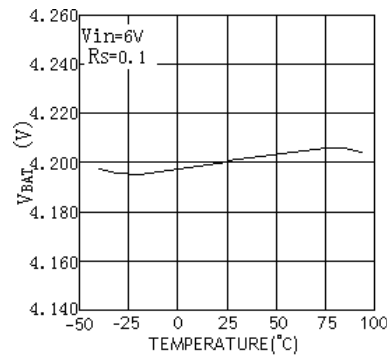


Figure 3

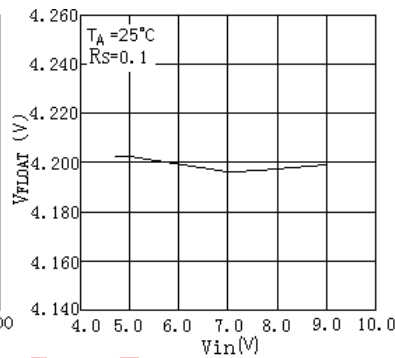


Figure 4

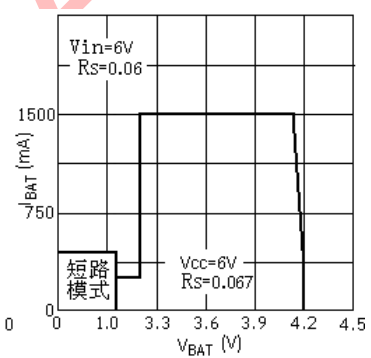


Figure 5

Figure 3: Cut-off voltage and ambient temperature relationship

Figure 4: The date of the relationship between battery voltage and supply voltage

Figure 5: Charging current and battery voltage relationship

Pin Function

LX (Pin#1): built-in the PMOSFET power pipe drain connection. LX is TP5000X the current output terminal and is connected to the external inductor as the input terminal of the battery charging current.

GND (Pin#2): Power Ground.

VS (Pin#3): Output current sense positive input terminal.

BAT (Pin#4): Battery voltage detection terminal. Positive terminal of the battery is connected to this pin.

TS (Pin#5): The battery temperature detection input. TS pin is connected to the NTC (negative temperature coefficient thermistor) sensor output terminal of the battery pack. If the TS pin voltage is less than 45% of the input voltage or greater than 80% of the input voltage, which means that the battery temperature is too low or too high, charging functions is suspended. If TS is tied directly to GND, battery temperature detection function is canceled, charging function works properly as normal temperature.

STDBY (Pin#6): Battery charge complete indication. When the battery is fully charged, the internal switch pulls this pin to low, indicating that charging is completed. During the charging process, this pin is high impedance.

CHRG (Pin#7): Battery in-charging indication. When charger is charging the battery, this pin is pulled low by internal switch, indicating that charging is in progress; When battery is fully charged, this pin is in a high impedance state.

VIN (Pin#8): The positive input terminal of the input power. The voltage on this pin for internal circuit power supply, and the VIN can work in the range of 4.5V to 9V and a 10 μ F Tantalum capacitor bypass. For any reasons, if power supply VIN is lower than $V_{BAT} + 50\text{mV}$, TP5000X enter shutdown mode, I_{BAT} drops to 4 μ A.

Operation Principle

TP5000X is a high efficiency switch-mode charger IC, designed specifically for single cell battery, with internal power transistors. Charging function combines trickle current, constant current and constant voltage charging. The charging current can be programmed with an external resistor, up to 2A maximum continuous charge current. No external backflow current protection diodes are needed. TP5000X consists of two open-drain output status outputs, charge status output $\overline{\text{CHRG}}$ and the battery is fully charged status outputs $\overline{\text{STDBY}}$.

Chip power management circuitry automatically reduces the charge current when the chip junction temperature exceeds 145°C, this feature allows users to maximize the use of the power handling capability of the chip, and do not have to worry about the chip overheating and damage to the chip or the external components.

Chip power management circuitry automatically reduces the charge current when the chip junction temperature exceeds 145°C, this feature allows users to maximize the use of the power handling capability of the chip, and do not have to worry about the chip overheating and damage to the chip or the external components.

When the input voltage is greater than the chip start-up threshold voltage and chip enable input the high termination or floating, TP5000X start charging the battery, $\overline{\text{CHRG}}$ pin output low, which means that charging is in progress. If the battery voltage is below a threshold voltage (e.g. 2.9V for a 4.2V Li-Ion battery), TP5000X charges the battery with a small pre-charge trickle current (this current is proportional to the constant current). Constant current charge is determined by the resistance between the VS pin and VBAT pin. When the battery voltage is close to cut-off

voltage (e.g. 50mV for a 4.2V Li-Ion battery, depending on the circuit connection resistance and the internal resistance of the battery voltage), the charging current decreases, TP5000X enters the constant charge mode. The end of the charge happens when the charge current is decreased to the cut-off current, **CHRG** Pin output high-impedance state, **STDBY** Pin output low.

For any reasons, if the battery voltage falls below the recharge threshold, TP5000X will automatically starts a new charge cycle.

TP5000X has implemented precise internal voltage reference, error amplifier and the resistor divider network to ensure the accuracy of the cut-off voltage of the charging function. The cut-off voltage for 4.2V Li-Ion batteries and 3.6V LFP batteries is within +-1% of the target voltage.

When input voltage decreases below the threshold voltage, or the input voltage is lower than the battery voltage, the charger enters a low-power-shutdown mode, no external backflow current protection diodes are needed. At this low-power-shutdown mode, TP5000X merely consumes about 4uA from battery attached.

Charge current setting

Battery charging current I_{BAT} is determined by the external current sense resistor R_s . Across this resistor (R_s) to adjust the threshold voltage and constant current to determine the ratio of the charging current, the voltage across the resistor (R_s) under a constant current state as 100mV.

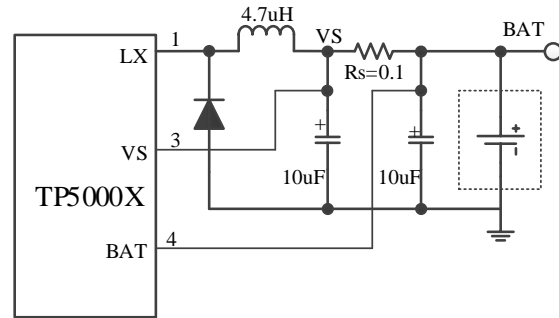


Figure 6: Charging Current Setting

The constant charging current can be set by the external resistor R_s using the following formula:

(Current in unit A, resistance in unit Ω)

$$R_s = \frac{0.1V}{I_{BAT}}$$

Examples: If constant charging current 1A is needed, put 1.0 at I_{BAT} , and the formula will come out $R_s=0.1$

Table 2 shows some of the settings corresponding to the type of current resistor R_s , fast and easy to design the circuit.

$R_s (\Omega)$	$I_{BAT} (mA)$
1.0	100
0.2	500
0.1	1000
0.067	1500
0.050	2000

Charge termination

At constant voltage phase, when the charge current drops to about 1/10 of the constant current charge current, the charging cycle is terminated. This condition is detected by using an internal comparator filter to monitor the voltage drop across R_s . When the voltage across R_s Poor to time exceeds 10mV or less

(typically 1.8ms), charging is terminated. The charging current is off, TP5000 enters standby mode, the input supply current drops to 170 μ A, Battery drain current outflow about 4 μ A.

In standby mode, the TP5000X continuous monitoring of the BAT pin voltage. If the lithium-ion battery to this voltage drops below 4.12V rechargeable switches below the limit, the new charge cycle begins and again supply current to the battery.

Charging Status Indicator

TP5000X has two open-drain status output terminal, $\overline{\text{CHRG}}$ and $\overline{\text{STDBY}}$. When the charger is charging, $\overline{\text{CHRG}}$ is pulled low, in other states, $\overline{\text{CHRG}}$ in a high-impedance state. When the battery temperature is outside the normal temperature range, $\overline{\text{CHRG}}$ and $\overline{\text{STDBY}}$ the pins are high impedance. When the status indicator is not used, the unused pin is connected to the ground.

Green $\overline{\text{STDBY}}$	Red $\overline{\text{CHRG}}$	State of charge
off	on	Is charging state
on	off	The battery is fully state
off	on	VADPT
off	off	Under-voltage, battery temperature is too high, too low fault condition or without battery access. (TS used)
Green light, red light flashes T=0.5-2S		BAT Connect the 10u capacitors, battery standby state (TS connected to ground)

Table 3: charging indicator status

Battery Over Temperature Protection

In order to prevent the temperature is too high or too low the damage caused by the battery, TP5000X integrated battery temperature detection circuit. The battery temperature detection is achieved by measuring TS pin voltage, the voltage of the TS pin is realized by the NTC thermistor inside the battery, and a resistor divider network, as shown in Figure 7. TP5000X two threshold TS pin voltage with the chip and compared to confirm that the battery temperature is outside the normal range. Within TP5000X is fixed to be fixed in. If the TS pin voltage, it means that the battery temperature is too high or too low, the charging process will be suspended; TS pin voltage between and the charge cycle resumes. If the TS pin to ground, the battery temperature detection function will be disabled.

Example: room temperature 25 $^{\circ}$ C under $R_{NTC} = 10k$, the set protection temperature 60 $^{\circ}$ C, 60 $^{\circ}$ C under $R_{NTC} = 3k$, then the calculation was $R_{NTC} = 3.6k$, the NTC resistor divider ratio of 45% of the supply voltage, i.e. 60 $^{\circ}$ C TP5000X stops charging.

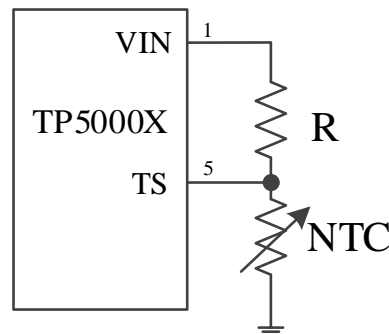


Figure 7: NTC connection diagram

In ESOP8 package applications, the TS side can be used for enable control. Connect the TS to the MCU control terminal, and the TS is pulled to GND for the active state. When the TS is pulled to the Vin voltage, it is in the shutdown state.

Internal Overheat Control

If the die temperature rises above a preset value of approximately 145 °C, an internal thermal feedback loop will reduce the set charge current. This feature prevents the TP5000X from overheating and allows the user to increase the upper limit of the power handling capability of a given board without risking damage to the TP5000X. The charging current can be set according to a typical (rather than worst case) ambient temperature, provided that the charger will automatically reduce the current under worst-case conditions.

Current Limit and Output Short-circuit Protection


TP5000X integrates a variety of protections, and the chip input end limits the maximum peak current of 3.5A to prevent chip damage caused by excessive current. When the output voltage is lower than about 1.2V, the chip enters short-circuit protection mode, and the chip input current is limited to 10% of the maximum peak current, about 350mA. The amount of current varies with the input voltage.

Power Adaptive Function

When Vin drops to 4.4V, the adaptive circuit starts; automatically reduces the output current until VCC no longer decreases; this function can avoid power reset or restart, when the high-current charging system uses USB, low-power power adapter or solar battery as the power source


Power supply voltage OVP (overvoltage protection)

When the Vin voltage is higher than 9.5-10V, the chip enters the overvoltage protection state. In this state, the chip stops charging and the indicator light is completely off. In this state, the maximum withstand voltage of the chip can reach 12V. If the customer's working environment needs to withstand 12V voltage, it is recommended that the customer connect 0.3-0.5 ohm power dissipation resistor at the power input end, as shown below.

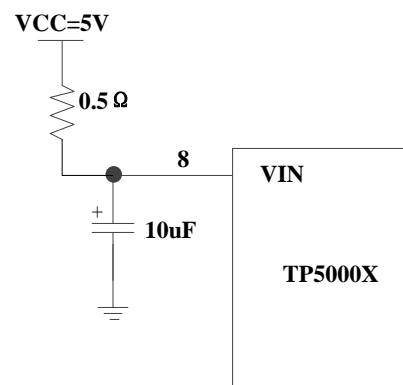


Package Description

8-pin ESOP8 package (mm)

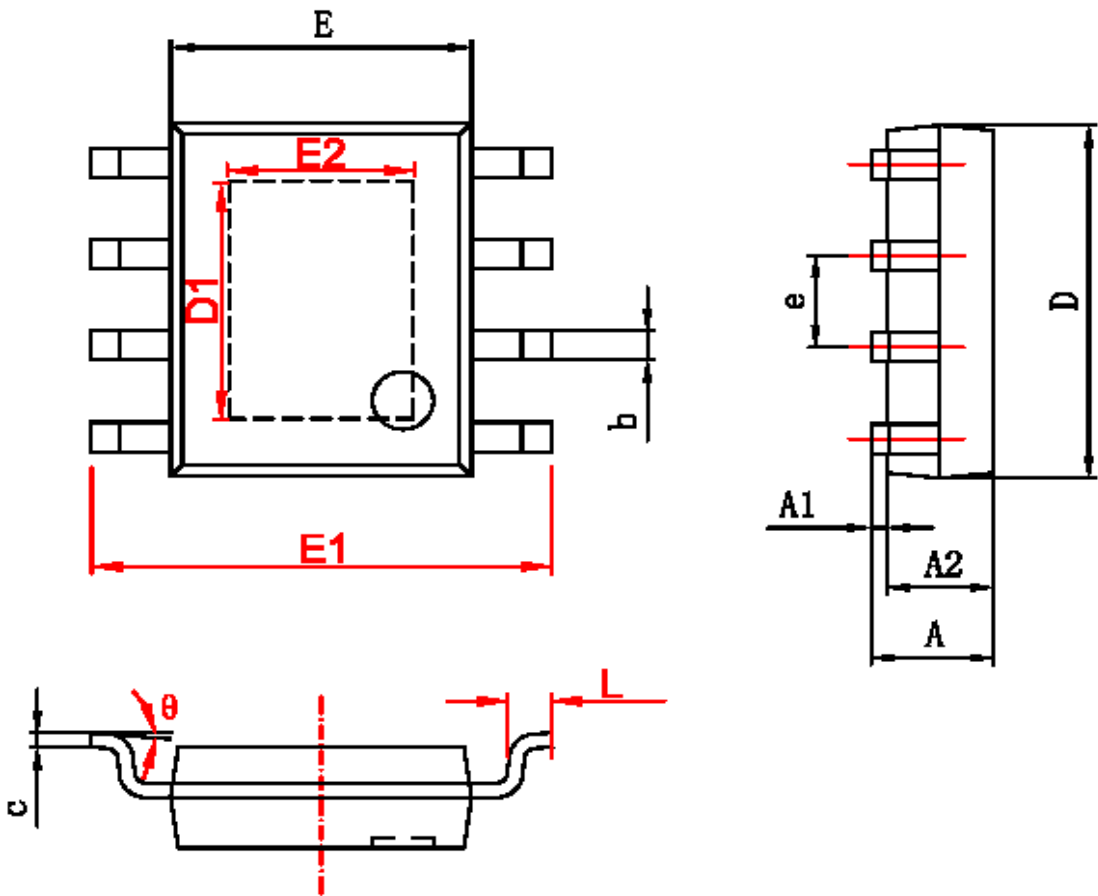

字符	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.150	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
D1	3.202	3.402	0.126	0.134
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2	2.313	2.513	0.091	0.099
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

SOP8/PP(150mil) (12R)-C(90×90) PACKAGE OUTLINE DIMENSIONS

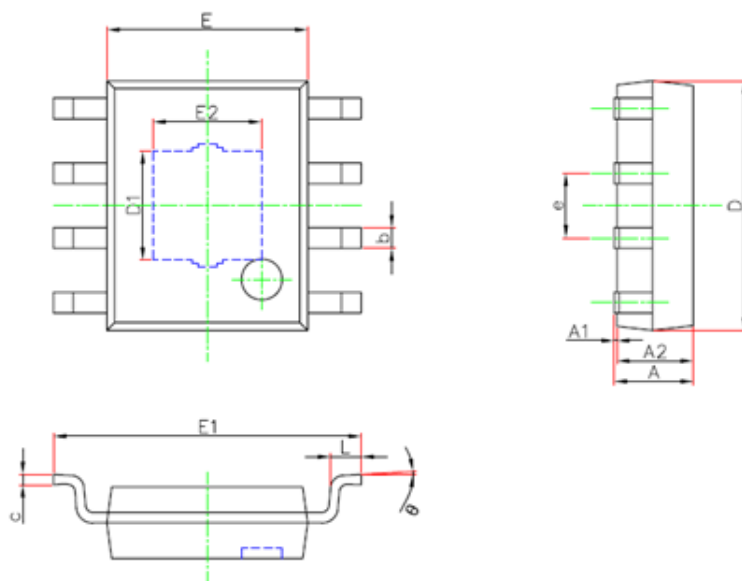

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.300	1.700	0.051	0.067
A1	0.000	0.100	0.000	0.004
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
D1	2.034	2.234	0.080	0.088
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2	2.034	2.234	0.080	0.088
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Notes for TP5000X use

- The circuit capacitance should be as close as possible to the chip.
- The VS end of the VIN end and BAT end use of tantalum capacitors, X5R or X7R level ceramic capacitors or electrolytic capacitors plus 0.1uF ceramic capacitor.
- The inductor selection of the current capacity is sufficient power inductor.
- The Schottky diode choose conduction voltage drop current capability greater than or equal to 2A Schottky diode.
- For VIN and LX should be wider than the ordinary signal lines through the traces of the current loop.
- Pay attention to the capacitive grounding line node location, and should try to make the ground point focused, well-grounded.
- Use the chip in the high-current work, should be considered a good connection of the chips at the bottom of the heat sink and the PCB to ensure good heat dissipation.